

**WIRELESS HA RECEIVER SPECIFICATIONS:**

Technical Specification

Product	Wireless HA Receiver
Operating Voltage	12 Vdc
Operating Current	30 mA
Connection to Mainboard	4 wires
Carrier Frequency	434MHz
Transmission Range	100m (Open Space)
Maximum Controllable Wall Switch	16 Wall Switches (32 Lights)
PCB Dimensions	102mm x 63mm
Weight	200g



Code : Pearl White



Code : Glossy Black



Code : Sparkling Gold




**WIRELESS WALL SWITCH SPECIFICATIONS:**

Technical Specification

Product	1-Gang Switch	2-Gang Switch
Maximum Load	1 x 600W	2 x 300W
Bypass Capacitor	25.0uF ± 10% 240/250Vac 50/60Hz	
Operating Temperature Range	0°C to +45°C	
Operating Humidity Range	5% to 85%	
Operating Voltage	220V-240 Vac	
Operating Frequency	50Hz ± 1Hz	
Carrier Frequency	434MHz	
Transmission Range	100m (Open Space)	
Dimensions	86mm x 86mm x 42mm	
Weight	300g	

Authorised Dealer

WIRELESS HOME AUTOMATION  
HA08

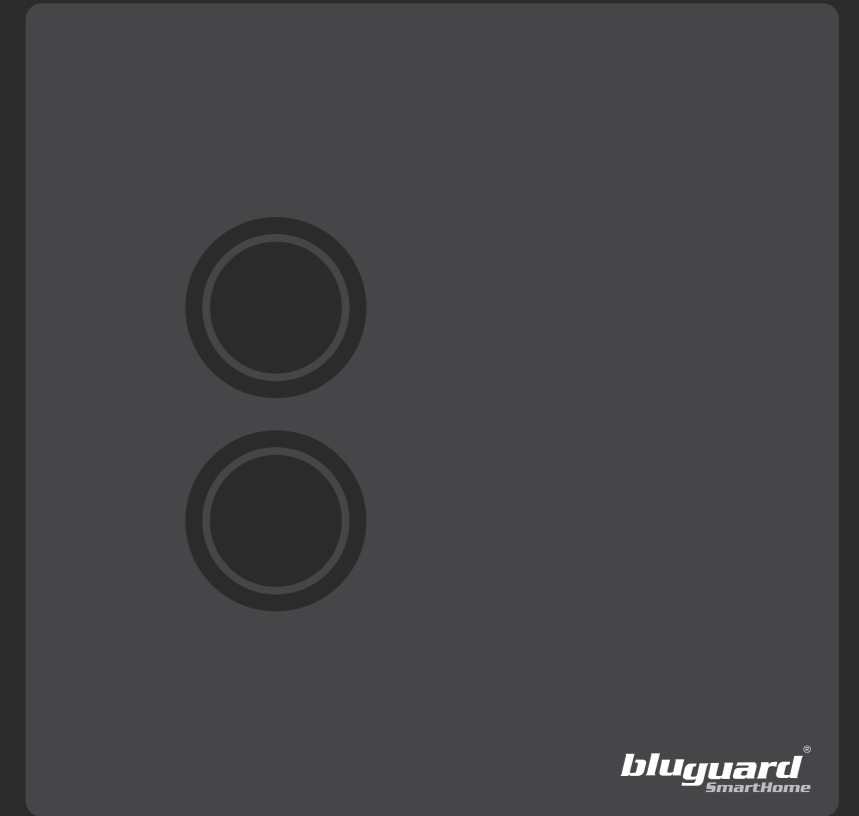



# HASSLE FREE



# STYLE

A style that match with the comfort of your room and the elegant design. With the light blue indicator, you will easily access to the switch.



# INSPIRED

Inspiring technology to connect the elegant wireless for hassle free installation process.



# SAFE

Sit back and relax, everything is under your control from the light to the security through our smart phone application.

WIRELESS HOME AUTOMATION

