


# XIMTOUCH

## PS 400 Standalone Access Controller

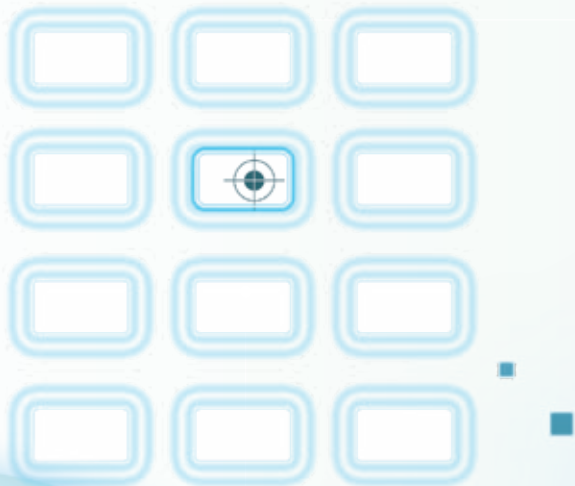

Mini all-in-one device

The PS-400 uses the latest microprocessor technology to operate door strikes and security systems that require a momentary (timed) or latching dry contact closure.

All programming is done through the keypad. Codes and operating parameters are stored within the microprocessor and can not be lost due to power failure

Technical Specification	
Supply Voltage	12VDC
Current Consumption	<20mA
Door Relay	1A
Alarm Output Load	200mA
Memory	Non Volatile Eprom Memory
User Codes	1000 User
Keypad	12 keys, 3 Status LED Indicators
Card Types	EM or EM Compatible
Card Detection Range	2 - 6 cm
Tamper Protection	Negative Loop, NC
Keypad Housing	Metal
Operating Temperature	-20 C to 50 C
Dimensions	L 135mm X W 58mm X H 26mm
Weight	500g

# XIMTOUCH

## PS 400

Access  
Controller

